



PRINTABLE CONTINUOUS TUBING (-CT)

TE Connectivity, a market leader for Identification Polyolefin Sleeves, is launching a heat-shrinkable high-performance tubing that can be used with any TE thermal transfer printer to create identification sleeves for wire and cable harnesses in harsh environments. Tubing supplied diameter ranges from 2.4mm (0.031Inch) to 50.8mm (2.0Inch) depending on product type. Existing System 6 (ladder format - SCE) product name and corresponding continuous formats (-CT) are shown below:

TMS-SCE	TMS-CT	Military Grade
ZHD-SCE	ZHD-CT	Low Fire hazard & Fluid Resistant
HX-SCE	HX-CT	Low Fire hazard
D-SCE	D-CT	Fluid Resistant
HT-SCE	HT-CT	High Temperature
RPS-SCE	RPS-CT	Commercial Grade

Spoiled continuous reels are useful when printing identical indents or when the user requires more flexibility on the length of the ident used. Reels are situated outside the printer on a TE universal reel holder (EC9926-000), product can be thread through a rear gap on any TE printer and follow the standard path through the printer. Cutter and perforator attachments can be used to create custom ident lengths immediately, or perforation allows the tubing to remain in a continuous format and each identification print can be easily removed.

The 'open' profile of the tube makes it easier to apply onto the wire and therefore reduces application time / increases productivity.

Print legibility on Identification tubing is guaranteed when using TE products in conjunction with the recommended TE software, ribbon and thermal transfer printers.

PRINTABLE CONTINUOUS TUBING (-CT)

BENEFIT STATEMENTS

- Create identification labels for wire and cable harnesses in harsh environments with any TE Connectivity thermal transferable printers
- User flexibility to design custom length markers from 5mm to 3 meters using TE WinTotal software
- Optimal reel length to maximize bulk printing and minimize storage space
- Reduce installation time with a more open profile

KEY FEATURES

- High performance thermal transfer printable tubing in a continuous format
- Material, sizes and colours to suit both harsh environment and commercial print criteria
- Compatible with all TE Printers
- Data input with Wintotal
- Open profile to allow easier application.
- Standard color White and Yellow. Other colors on demand

Part Description	Part Number
TMS-CT-50M-3/32-OUT-4	EL7643-000
TMS-CT-50M-3/32-OUT-9	EL7660-000
TMS-CT-50M-1/8-OUT-4	EL7644-000
TMS-CT-50M-1/8-OUT-9	EL7661-000
TMS-CT-50M-3/16-OUT-4	EL7645-000
TMS-CT-50M-3/16-OUT-9	EL7662-000
TMS-CT-50M-1/4-OUT-4	EL7646-000
TMS-CT-50M-1/4-OUT-9	EL7663-000
TMS-CT-50M-3/8-OUT-9	EL7664-000
TMS-CT-50M-1/2-OUT-4	EL7648-000
TMS-CT-50M-1/2-OUT-9	EL7665-000
TMS-CT-50M-1-OUT-9	EL7667-000
TMS-CT-50M-2-OUT-4	EL7652-000

HX-CT-50M-2.4-OUT-4	EL8203-000
HX-CT-50M-2.4-OUT-9	EL8194-000
HX-CT-50M-3.2-OUT-4	EL8204-000
HX-CT-50M-3.2-OUT-9	EL8195-000
HX-CT-50M-4.8-OUT-4	EL8205-000
HX-CT-50M-4.8-OUT-9	EL8196-000
HX-CT-50M-6.4-OUT-4	EL8206-000

(*)HX-CT-40M-38.1-OUT-4, HX-CT-40M-25.4-OUT-4
D-CT-40M-38.1-OUT-4

supplied in 40 meter reels.

APPLICATIONS

- Rail
- Aerospace
- Industrial
- Automation
- Panel builders

MATERIALS

- Polyolefin

STANDARDS & SPECIFICATIONS

- **TMS-CT:** EN45545-2, SAE-AMS-23053/5, MIL-STD-202, UL STD 224 - E35586
- **ZHD-CT:** EN45545-2, NFPA 130
- **HX-CT:** EN45545-2, NF F 16-101, London Underground 1-085
- **D-CT:** EN45545-2, NFPA 130, MIL-STD-202 Method 215
- **HT-CT:** EN45545-2, SAE-AS4952, MIL-STD-202
- **RPS-CT:** MIL-STD-202, NFPA 130, UL STD 244 - E35586

Part Description	Part Number
HX-CT-50M-6.4-OUT-9	EL8197-000
HX-CT-50M-9.5-OUT-4	EL8207-000
HX-CT-50M-12.7-OUT-4	EL8208-000
HX-CT-50M-19.0-OUT-4	EL8209-000
HX-CT-40M-25.4-OUT-4	EL8210-000
HX-CT-40M-38.1-OUT-4	EL8211-000














D-CT-50M-2.4-OUT-4	EL8091-000
D-CT-50M-2.4-OUT-9	EL8082-000
D-CT-50M-3.2-OUT-4	EL8092-000
D-CT-50M-3.2-OUT-9	EL8083-000
D-CT-50M-4.8-OUT-4	EL8093-000
D-CT-50M-4.8-OUT-9	EL8084-000
D-CT-50M-6.4-OUT-4	EL8094-000
D-CT-50M-6.4-OUT-9	EL8085-000
D-CT-50M-9.5-OUT-4	EL8095-000
D-CT-50M-12.7-OUT-4	EL8096-000
D-CT-50M-18.0-OUT-4	EL8105-000
D-CT-50M-25.4-OUT-4	EL8106-000
D-CT-40M-38.1-OUT-4	EL8097-000

PRINTABLE CONTINUOUS TUBING (-CT)

Part Description	Part Number
HT-CT-50M-1/8-OUT-9	EL7355-000
HT-CT-50M-3/16-OUT-9	EL7356-000
HT-CT-50M-1/4-OUT-9	EL7357-000
HT-CT-50M-3/8-OUT-9	EL7358-000
HT-CT-50M-1/2-OUT-9	EL7359-000
HT-CT-50M-3/4-OUT-9	EL7360-000


RPS-CT-50M-3.2-OUT-4	EL7597-000
RPS-CT-50M-3.2-OUT-9	EL7583-000

Part Description	Part Number
RPS-CT-50M-4.8-OUT-4	EL7598-000
RPS-CT-50M-4.8-OUT-9	EL7584-000
RPS-CT-50M-6.4-OUT-4	EL7599-000
RPS-CT-50M-6.4-OUT-9	EL7585-000
RPS-CT-50M-12.7-OUT-4	EL7601-000
RPS-CT-50M-12.7-OUT-9	EL7587-000
RPS-CT-50M-19.0-OUT-4	EL7602-000
RPS-CT-50M-25.4-OUT-4	EL7603-000
RPS-CT-50M-25.4-OUT-9	EL7589-000

Colour Coding System		
Colour Legend	Name	Colour
0	Black (BK)	
1	Brown (BN)	
2	Red (RD)	
3	Orange (OG)	
4	Yellow (YE)	
5	Green (GN)	
6	Blue (BU)	
7	Violet (VT)	
8	Grey (GY)	
9	White (WH)	
2L	Pink (PK)	
8A	Silver (SR)	
X	Clear (CL)	

PRINTABLE CONTINUOUS TUBING (-CT)

Imperial Measurement (Inches)	Imperial Measurement (Inches)	Metric Measurement (mm)
3/32	0.093"	2.4mm
1/8	0.125"	3.2mm
3/16	0.175"	4.8mm
1/4	0.250"	6.4mm
3/8	0.375"	9.5mm
1/2	0.500"	12.7mm
3/4	0.750"	19.1mm
1	1.000"	25.4mm
1 1/2	1.500"	38.1mm
2	2.000"	50.8mm

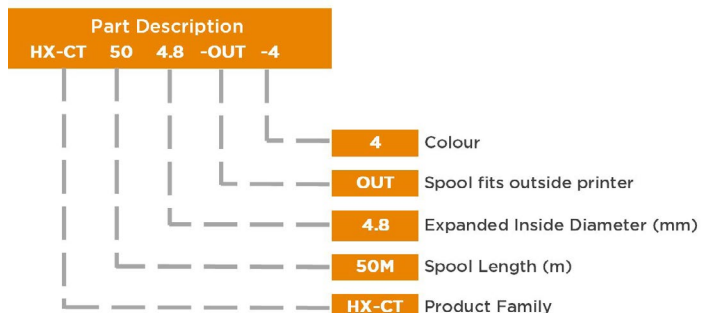

- Ordering example: HX-CT-50M-4.8-OUT-9
- i.e. Product family, Spool length, Expanded inside diameter, OUT and colour

Optimal print result on TE identification Continuous Tube products can be achieved by using the [WINTOTAL](#) software in conjunction with [TE Printers](#) and recommended [Ribbon](#).

Printer, Product and Ribbon information can be found in the ribbon matrix document: [Click here](#).

te.com

© 2021 TE Connectivity. All Rights Reserved.

TE, TE Connectivity, and the TE Connectivity (logo) are trademarks of TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

1-1773982-8 01/21 AK